

smartshredz™

NATURAL BLO -IN FIBER INSULATION



Insulation Blowing Machine



Exceptional Performance

Our highly portable SmartShredz fiber blowing machine, produced for Service Partners by Intec, processes over 800 pounds of cellulose or 200 pounds of fiberglass per hour while weighing only 142 pounds with a recently enhanced aluminum airlock. This system provides ease of transportation to the job site, in addition to timely installation of attic insulation – less than 1 hour to install R-19 cellulose and under 1-1/2 hours to install R-19 fiberglass in a 1000 square foot attic.

Ease of Use

The system's control panel and wired remote provide for ease of operation from either the unit or the attic. Handles, wheels, and its small size enable efficient transfer between retail location and job site. Hose, connectors and clamps come standard -- everything you need to begin using immediately.

Capabilities

The SmartShredz fiber blowing machine comes equipped with a slide gate to control material flow -- providing its users sidewall retrofit capabilities in addition to attic installations. Be it cellulose drill & fill, or fiberglass dense pack, this system can do-it-all.

Total Reliability

The powder coated exterior enables rigorous use, while the automatic chain tensioner provides for high uptime capability. Minimal maintenance, combined by support from Intec's technical service team, provides for a system experience offering some of the highest industry uptimes and lowest life-cycle costs.

When looking for a capable, versatile, Do-It-Yourself unit with a track record of rigorous use, look no further than the SmartShredz fiber blowing machine.

COMES STANDARD WITH


PRODUCTION



- (2) 50' x 2.5" Blowing hose
- (1) 2.5" Steel hose connector
- (3) 2.5" Stainless steel hose clamps
- (1) 100' Remote cord
- (1) Slide gate
- (4) Handles



Cellulose Production
800 lbs per hour



Fiberglass Production
204 lbs per hour


Specifications



| | |
|----------------------------|--|
| Dimensions | 38"H x 29"W x 29" L |
| Weight | 142 lbs |
| Weight (shipping) | 215 lbs |
| Production (Single Blower) | 800 lbs/hr- Cellulose 204 lbs/hr- Fiberglass |
| Hose Outlet Size | 2.5" |
| Remote Cord | 16/4 x 100' |
| Hopper Capacity | 5.2 cu. ft. |
| Drive motor | 115VAC 1/2 HP - 7.8 amps 230VAC 1/2 HP - 4.1 amps |
| Airlock | 6" Aluminum |
| Blower | 115VAC 1 or 2, 2 stage, 8 amp, 104 cfm 230VAC 1 or 2, 2 stage, 4 amp, 126 cfm |
| Electrical* | 115 VAC / 60 Hz |
| Power cord | (1) 14/3 x 6' |
| Warranty | 1 year limited; 90 days electric, airlock system and blower |

* 230 VAC / 50 Hz available upon request

Electrical Features

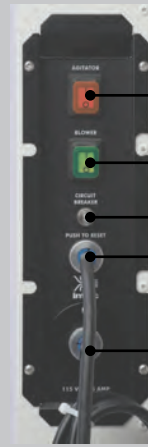

- Agitator Switch
- Blower Switch
- Agitator Circuit Breaker
- Remote Cord
- Power Cord

Options

Hopper Extension



Applications

- Attics
- Dense Pack
- Drill & Fill

Accessories



Pressure Gauge



Hose Bag



150'
Remote Cord



Hose Swivels
2-6" Available

The Intec Pledge

Provide the finest equipment in the industry with the highest standards while continuing to strive for 100% satisfaction.

Distributed By



1-800-325-5320

Manufactured By



1-800-666-1611

P.O. Box 579
3771 Monarch Street
Frederick, CO 80530 USA

Local: 303-833-6644
Fax: 303-833-6650
www.intecorp.com