

DESIGNED FOR FUNCTION AND BUILT TO LAST

The Turbo Vac power comes from an electric start Honda V-Twin 27 H.P. motor (net 22 H.P.) with a 4-gallon fuel tank and oversized shaft with extra quiet exhaust. The 6-inch vacuum inlet and outlet enable smooth insulation flow through the heavy 1/4-inch abrasive resistant steel shroud and past the 1/4-inch-thick abrasive resistant impeller. Easily wheelbarrow it around job site on 10-inch run-flat tires, with no fear of tipping; this machine features an exclusive anti-tip frame.



Part #TURBOVAC690SP-DD

Portability

Weighing 362 pounds, the turbovac is well balanced and secured to an anti-tip base with run-flat tires, making it easy to navigate at job sites.

Value Add


Oversized and abrasive resistant impeller, double-thick abrasive resistant shroud, run-flat wheels, powder-coated steel body, and pivoting inlet and outlet gate.

Specifications

- Weight – 362 pounds
- Inlet/Outlet – 6 inches
- 10 inch Run Flat Tires
- Honda V-twin Engine w/electric start
- 27 HP Gross, 22 HP Net
- Fuel Tank – 4 Gal – Gasoline

Warranty

- Engine 36 Months
- Components 12 Months

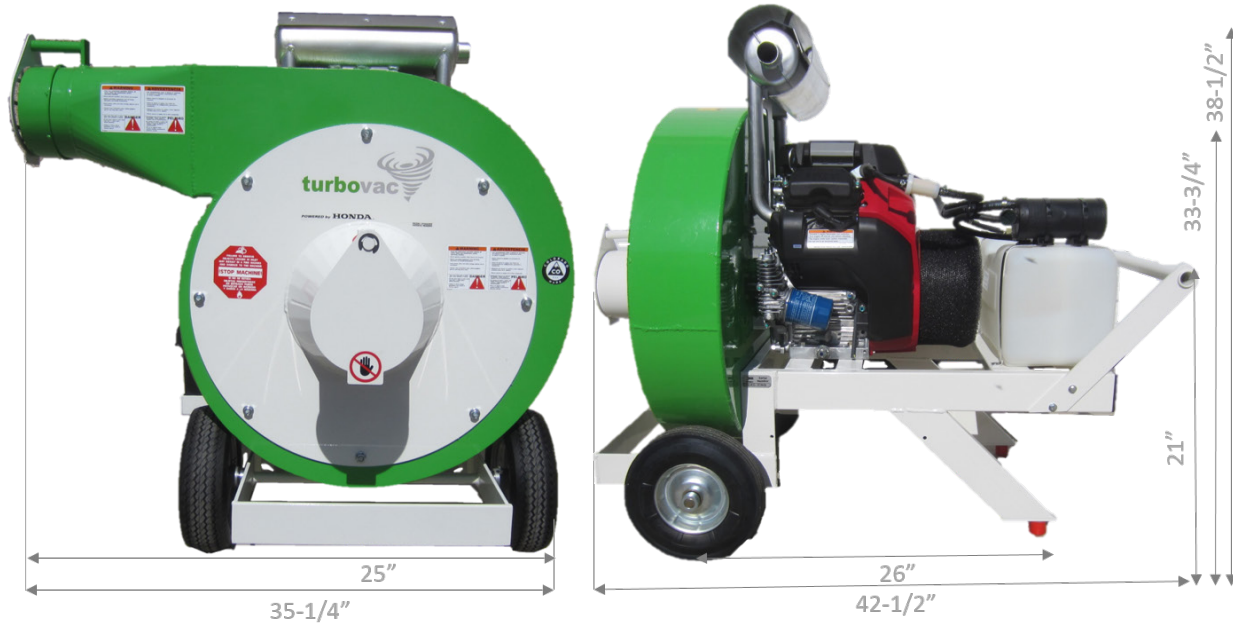

Part #TURBOVAC690SP-DD

VACUUM ACCESSORIES



Turbovac Debris Box & Vactuff Hoses & Pick-Up Tube

Protect your investment; the turbovac shield limits the ability of foreign objects (nails, screws, metal) to get into your impeller and cause damage to your impeller, shroud, and engine.

Part #BLO-IT75015-00 (turbovacSHIELD)
Part #TURVOVACTUBE62 (turboTUBE 6.2 6 in diameter w/handles)
Part # BLO-74204-00 (Vortex VacTUFF 6" x 50')



Insulation Removal Bags

75 cu ft – Thicker denier for greater strength, large capacity (48 in. diameter x 72 in. length)

Part # TURBOVACBAG (80 gsm)
Part # TURBOVACBAG-XHD – (118 gsm)

PRODUCT SPEC CHART

	turbovac	turbovac eco	
DESCRIPTION	Portability	wheelbarrow	cannon-mount
	Weight (lbs)	362	248
	Inlet /Outlet (inches)	6	6
	Optional Inlet	NA	4
ENGINE/MOTOR	Honda V-twin Engine w/electric start	27 HP Gross/22 HP Net	NA
	Vanguard V-twin Engine w/electric start	NA	18 HP
	Oil Alert - auto shut off	•	•
	Fuel Tank Size	4 Gal	6.95 quart
	Translucent Fuel Tank & Filters	•	NA
	Carb Compliant	•	•
	Hour Meter	•	•
	Extra Quiet Exhaust	•	•
	Shaft - Oversized	•	•
	Sealed Electric Motor	NA	NA
	Power Cord	NA	NA
Power Needs	NA	NA	
UPGRADED INTERNAL PARTS	Impellor - Oversized abrasive resistant	1/4 inch thick	1/4 inch thick
	Shroud - double thick abrasive resistant	1/4 inch thick (wear section)	1/4 inch thick (wear section)
	Wheels - Run Flat	10 inch	10 inch
	Powder Coated Steel Body	•	•
	Pivoting Inlet & Outlet Gate	•	•
	Optional Dryer Plug Conversion	NA	NA
	Warranty Info		
	Warranty 3 years - Engines	•	•
Warranty 1 year - other components	•	•	



**CONTACT US
FOR MORE INFO!**

service-partners.com